
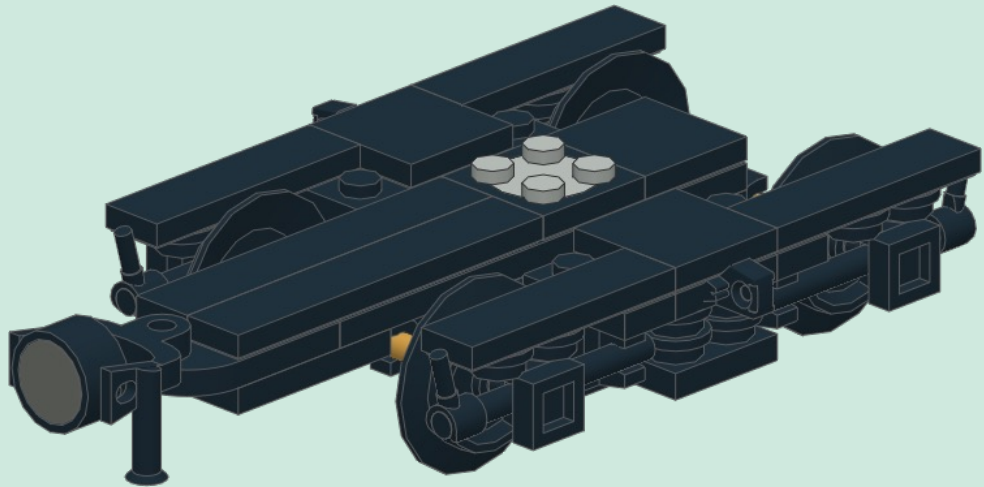


Reference Instructions Sheet

106

Rev
A

**These instructions
call for the use of non
LEGO® brand parts.**

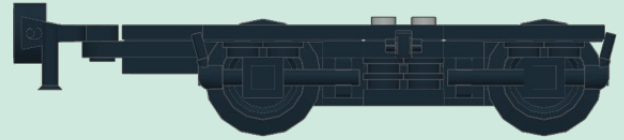



designed by Ronald Vallenduuk



Notes

Both varieties of train wheels can be used. Newer variety (2878c02) requires substitute brass rod axle cut to 40 mm.


These instructions require two 1/8 in. (3.18 mm) diameter brass tubes cut to 32/34 mm long. Tubes should be deburred with a file after cutting.

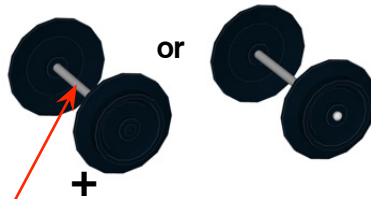

K&S Precision Metals
P/N 8168 .081 x 12 in. brass rod
cut to 40 mm



1/8" dia. brass tube
Cut to 34 mm with 57878
Cut to 32 mm with 2879

K&S Precision Metals
P/N 8127 1/8 x 0.014 x 12 in. or
P/N 9821 3.0 x 0.45 x 300 mm

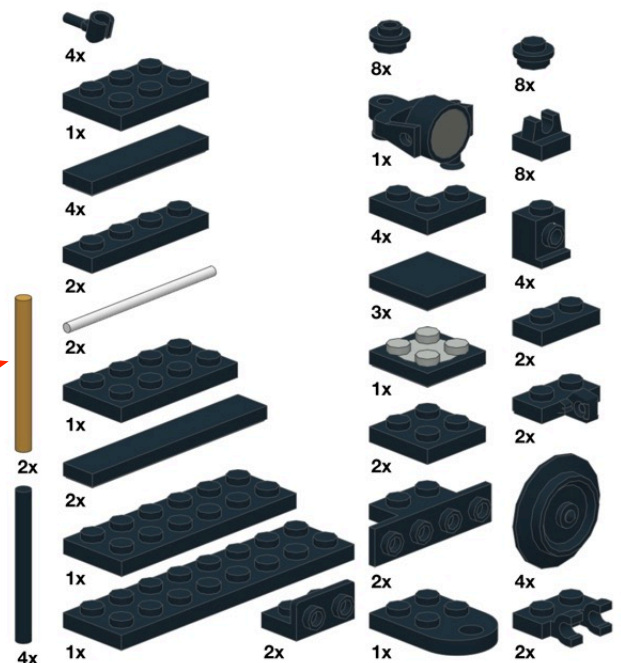


This set is not an official set. LEGO® is a trademark of the LEGO group of companies which does not sponsor, authorize or endorse this product.


1






1




2





3





2

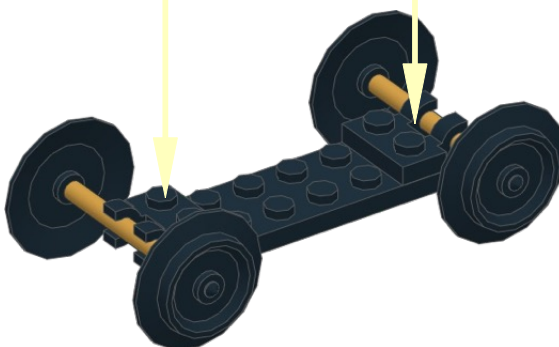



3

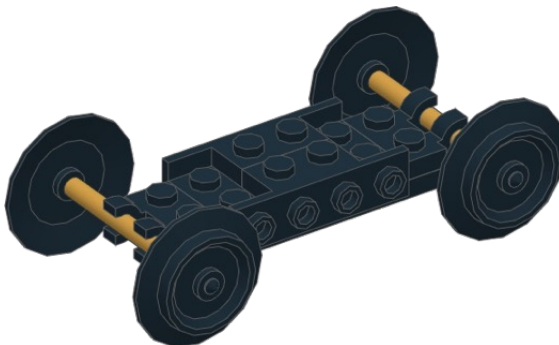



4

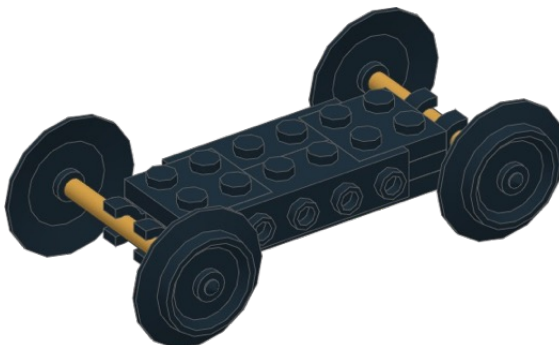


1




2




3





4

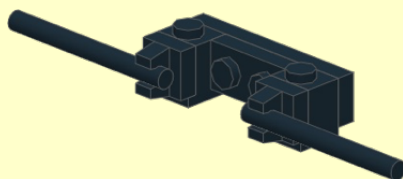

5

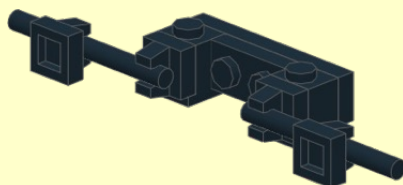


6

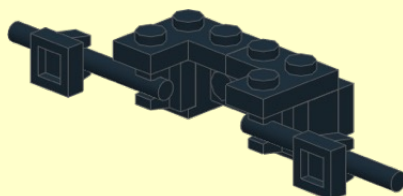





7





8





9

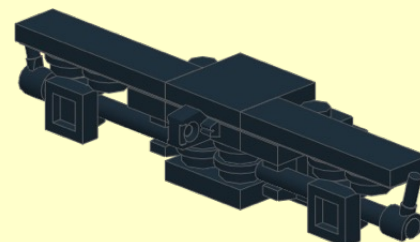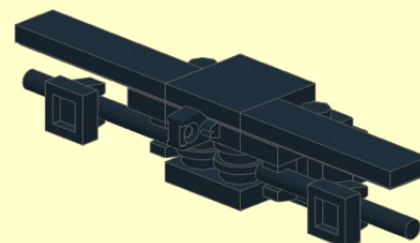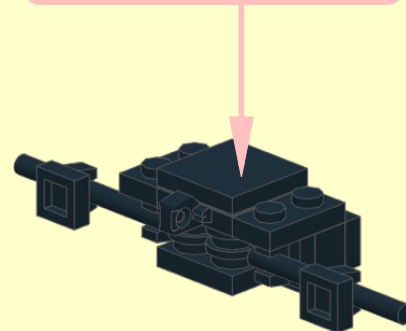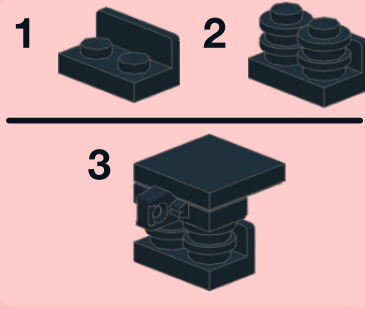



5

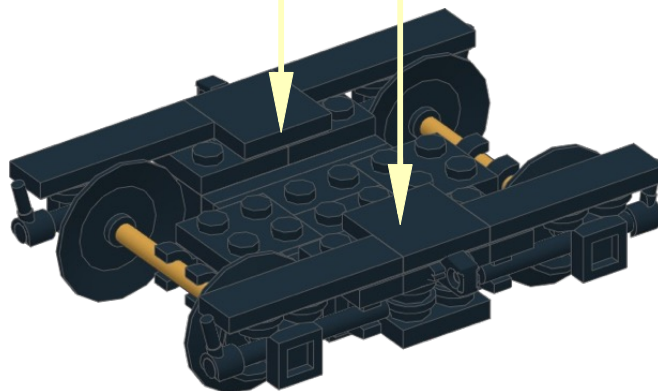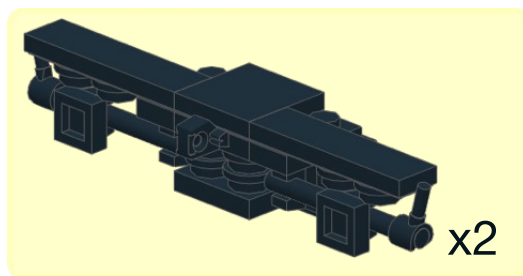



6

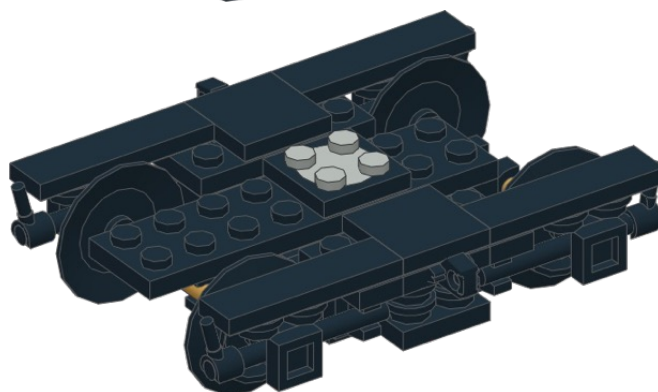

7

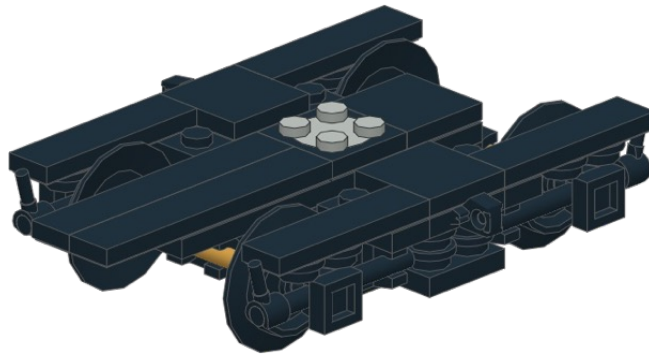

8

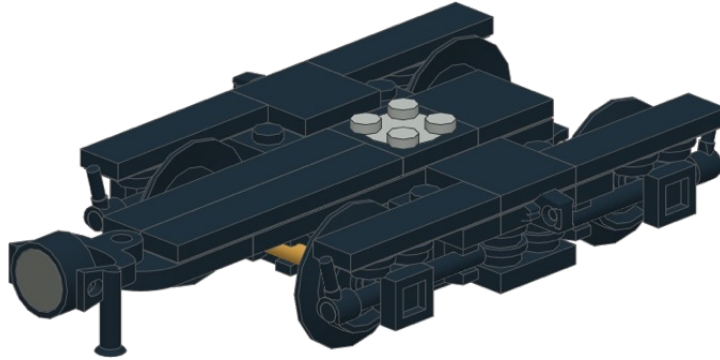

9

