
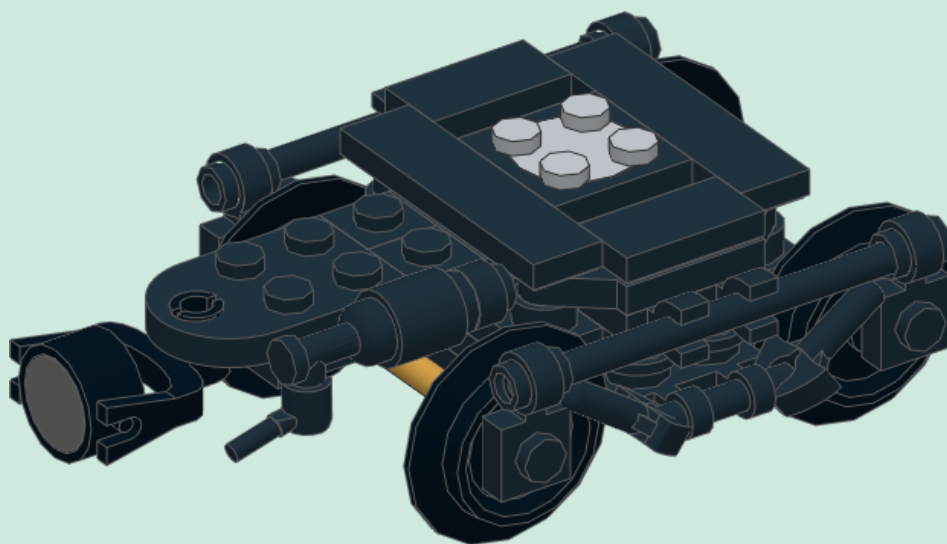


These instructions call for the use of non LEGO® brand parts.

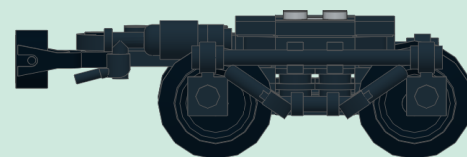

Parts List



Notes

Both varieties of train wheels can be used. Newer variety (2878c02) requires substitute brass rod axle cut to 40 mm.


These instructions require two 1/8 in. (3.18 mm) diameter brass tubes cut to 32/34 mm long. Tubes should be deburred with a file after cutting.

<p>57878 (part of 2878c02)</p>	<p>2879 (part of 2878c01)</p>	<p>10x</p>	<p>9x</p>	<p>4x</p>
<p>or</p>	<p>1x</p>	<p>2x</p>	<p>2x</p>	<p>1x</p>
<p>+</p>	<p>1x</p>	<p>2x</p>	<p>1x</p>	<p>2x</p>
<p>K&S Precision Metals P/N 8168 .081 x 12 in. brass rod cut to 40 mm</p>	<p>1/8" dia. brass tube Cut to 34 mm with 57878 Cut to 32 mm with 2879</p>	<p>2x</p>	<p>1x</p>	<p>2x</p>
<p>K&S Precision Metals P/N 8127 1/8 x 0.014 x 12 in. or P/N 9821 3.0 x 0.45 x 300 mm</p>	<p>6L</p>	<p>4x</p>	<p>3x</p>	<p>2x</p>
	<p>2x</p>	<p>1x</p>	<p>1x</p>	<p>1x</p>
	<p>1x</p>	<p>1x</p>	<p>1x</p>	<p>2x</p>



1





2

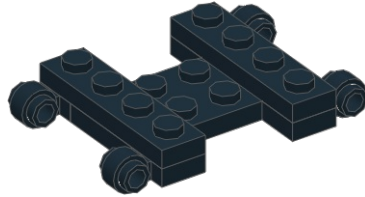



3

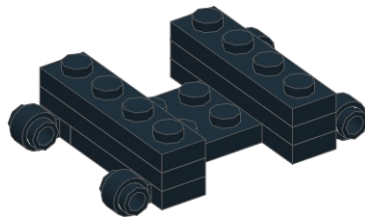


4

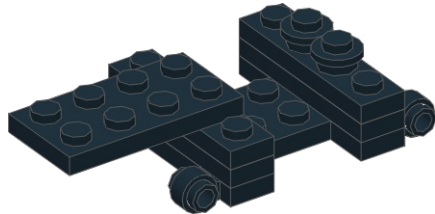


5

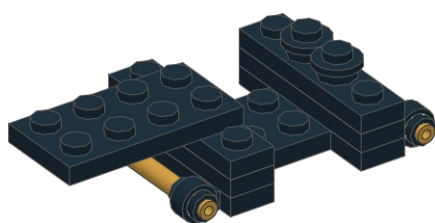



6

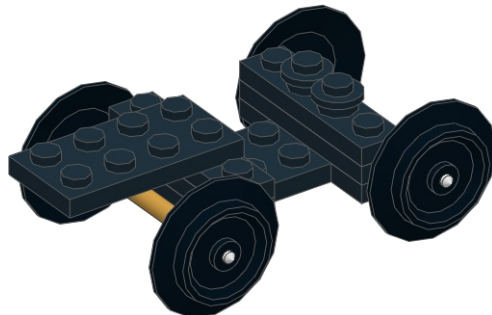


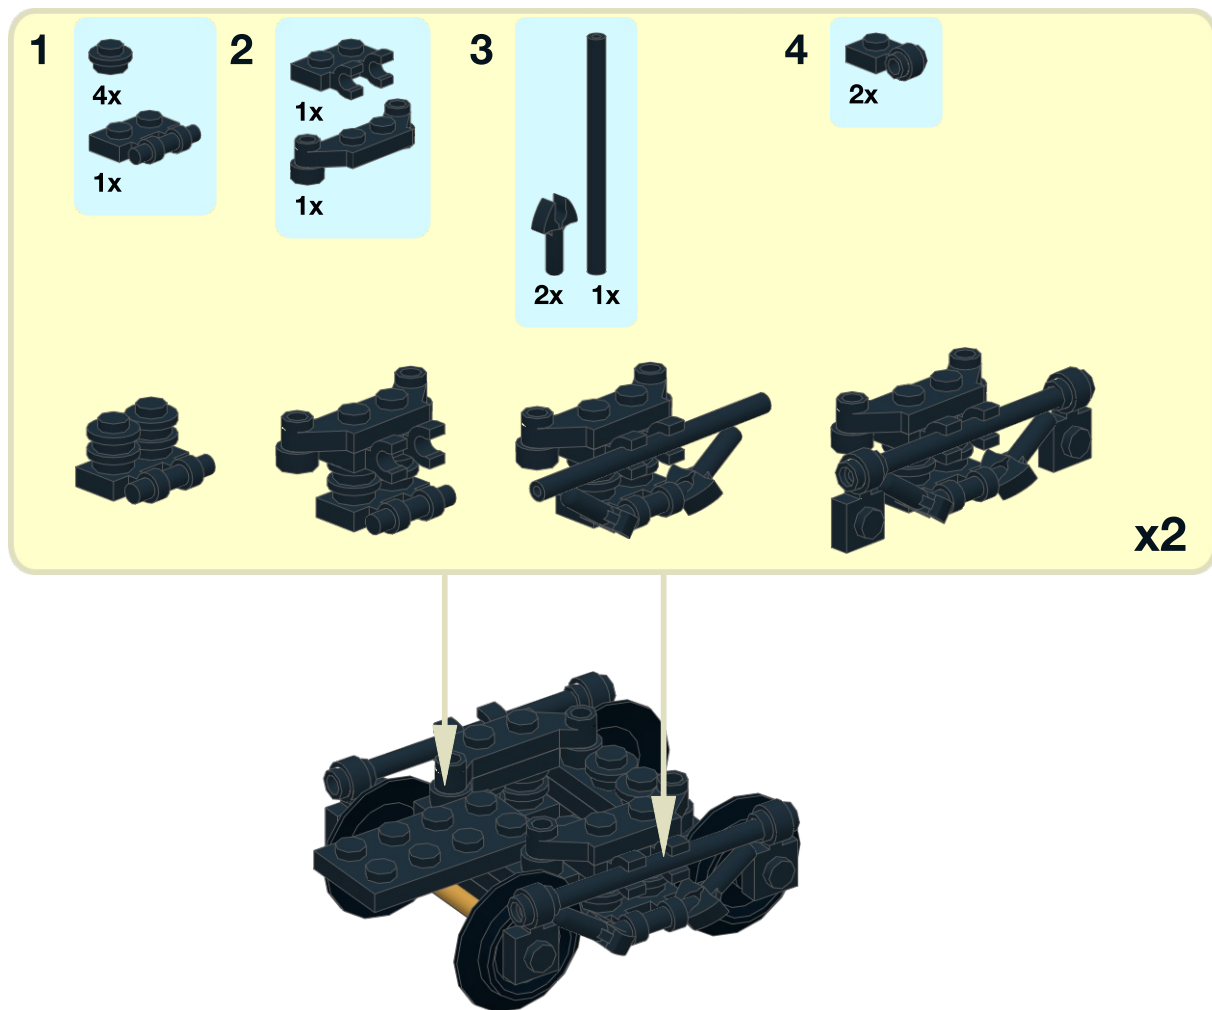


8

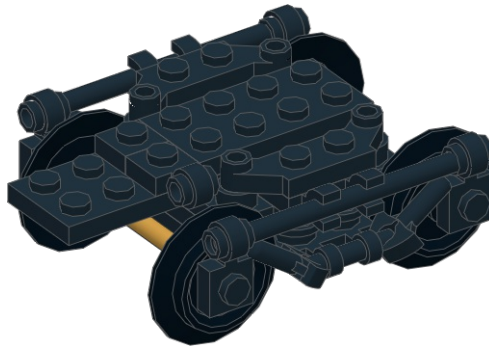

9

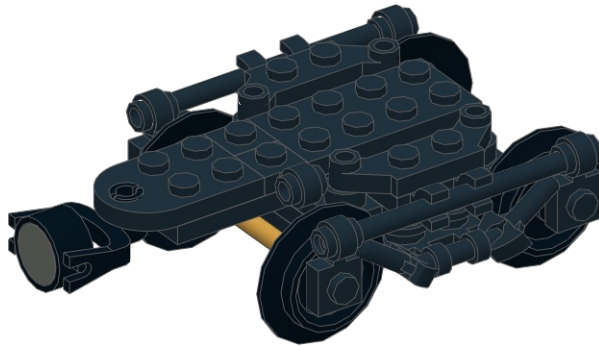

10

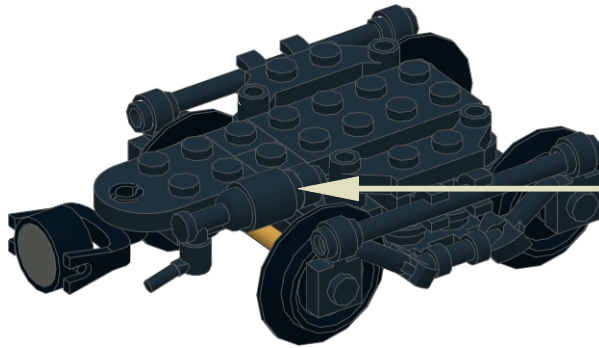

11

