



These instructions call for the use of non LEGO® brand parts.



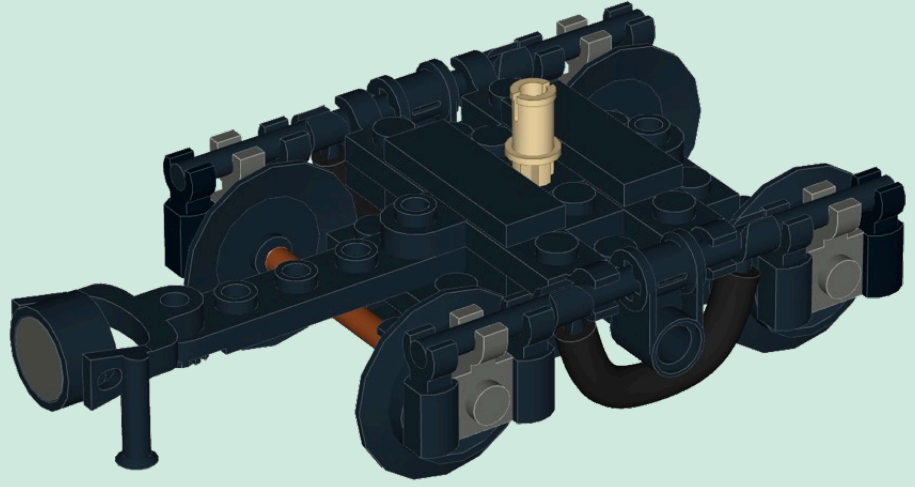


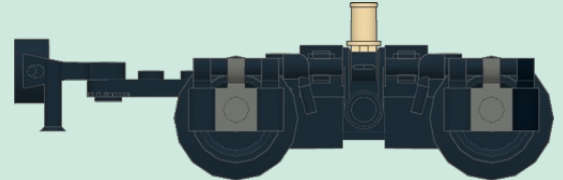
















designed by Ronald Vallenduuk

Parts List


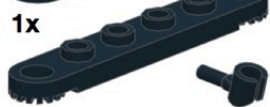
Notes

Both varieties of train wheels can be used. Newer variety (2878c02) requires substitute brass rod axle cut to 40 mm.


These instructions require two 1/8 in. (3.18 mm) diameter brass tubes cut to 32/34 mm long. Tubes should be deburred with a file after cutting.

<p>57878 (part of 2878c02)</p>  <p>+</p> <p>K&S Precision Metals P/N 8168 .081 x 12 in. brass rod cut to 40 mm</p> <p>1/8" dia. brass tube Cut to 34 mm with 57878 Cut to 32 mm with 2879</p> <p>K&S Precision Metals P/N 8127 1/8 x 0.014 x 12 in. or P/N 9821 3.0 x 0.45 x 300 mm</p>	<p>2879 (part of 2878c01)</p> 	<p>4L</p>  <p>2x</p>	<p>4 mm Technic pneumatic hose</p>  <p>2x</p>	 <p>1x</p>  <p>3x</p>  <p>4x</p>  <p>2x</p>  <p>1x</p>  <p>1x</p>  <p>4x</p>	 <p>4x</p>  <p>1x</p>  <p>8x</p>  <p>1x</p>  <p>2x</p>	 <p>2x</p>  <p>6x</p>  <p>2x</p>  <p>4x</p>
--	--	--	---	---	---	---



1





2

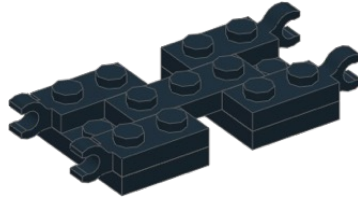



3

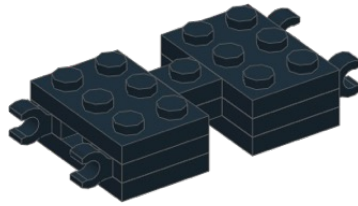



4

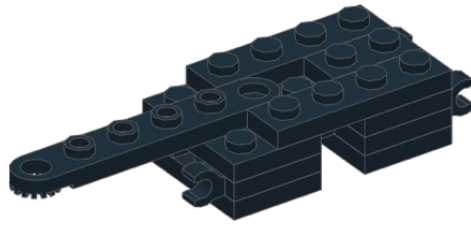

5

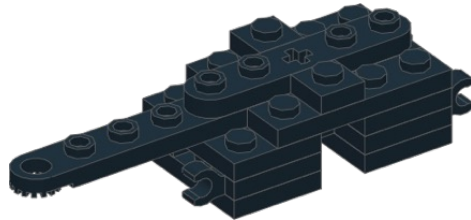


6

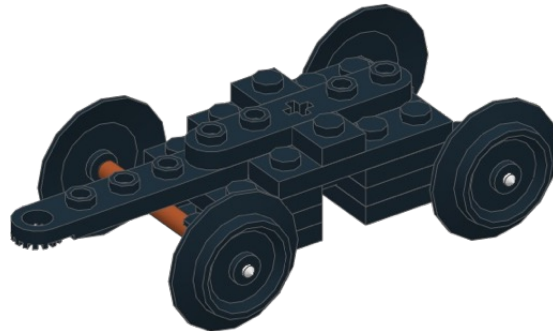


1

2x
1x




2

1x 2x




3

2x 3x 1x



4

2x




5

4L →



x2

7

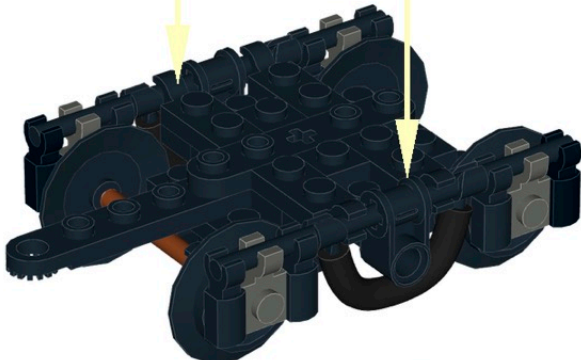

8

1x
1x
2x

